


# Switching actuator 2 fold SA2-02B




21mm  
Ø 65mm



- Switching unit SA2-02B is designated for switching up to two independent devices connected to the system.
- SA2-02B contains 2 independent relays with NO potential-free contact.
- Maximal loadability of each contact is 8 A/2000 VA/AC1.
- Each of 2 output contacts can be controlled and addressed individually.
- LED diodes on front panel signalize state of each output contact.
- SA2-02B in MINI design is designated for mounting into a wiring box.
- Unit is produced in two versions that differ by material used in relay contacts - AgSn and AgNi.

## Device description

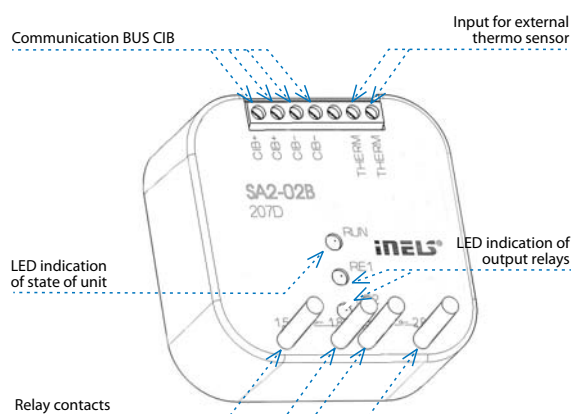

## Technical parameters:

### Inputs

Temperature measuring:	YES, input for external thermo sensor see accessories pg. 53
------------------------	--

### Outputs

Output:	2 x NO 8 A/AC1 see chart pg. 32
Switching voltage:	250 V AC1, 24 V DC
Switched load:	2000 VA/AC1, 192 W/DC
Surge current:	30 A/<3s
Insulation voltage between outputs and in-built circuits:	SELV according to EN 60950
Insulation voltage between output relays RE1 a RE2:	1000 V AC
Minimal switching current:	100 mA
Switching frequency/no load:	1200 min <sup>-1</sup>
Switching frequency/rated load:	6 min <sup>-1</sup>
Mechanical lifetime:	3 x 10 <sup>7</sup>
Electrical lifetime for AC1:	0,7 x 10 <sup>5</sup>
Indication of outputs:	2x red LED

### Communication

Data BUS:	CIB BUS
-----------	---------

### Power supply

Supply voltage/rated current:	27 V DC/60 mA, from CIB BUS
Indication of state of unit:	green LED

### Connection

Connection:	terminal block
Max. wire size:	0,5 mm <sup>2</sup> - 1 mm <sup>2</sup>
Power outputs:	4x conductor CY, profile 2,5 mm <sup>2</sup>

### Operating enviroment

Operating temperature:	-20 .. +55 °C
Storage temperature:	-30 .. +70 °C
Protection degree:	IP 30
Overvoltage category:	III.
Pollution degree:	2
Operating position:	any
Installation:	into a wiring box

### Size and weight

Size:	49 x 49 x 21 mm
Weight:	63 g

## Connection

